




PRODUCT DESCRIPTION: DISSOLVABLE ALLOY

TervAlloy™ 3143 (HD) is a special high ductility version of Terves' patented dissolvable magnesium designed for oil and gas applications. This material is based on our TervAlloy™ 3241 (TAx100E) product offering, and demonstrates similar dissolution rates in potassium chloride and sodium chloride brine solutions.

TervAlloy 3143 is designed for higher ductility applications – allowing greater flexibility to meet the needs of specific customer applications.

This product can be purchased in one inch increments in lengths up to 48 inches (depending on shape).

3143 Dissolution vs Temperature

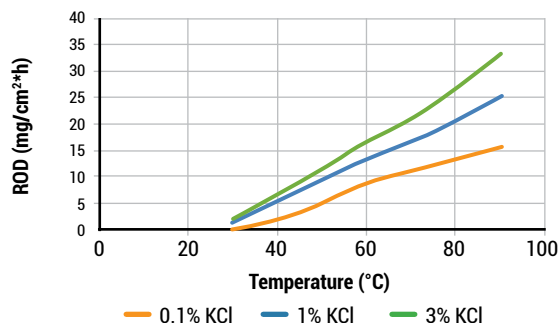

Physical Data

Density 1.78 g/cc

Dissolution Rates in Common Mediums for TA-3143 (mg/cm² hr)

Temp (°C)	1% KCl	3% KCl	8% KCl	3.5% NaCl
30	2	2	-	-
45	8	9	-	-
60	14	17	20.5	-
75	19	24	-	-
90	25	43	48.4	39.9

Mechanical Data

4" Solid Rod 5:1 Extrusion Ratio

Ultimate Tensile Strength (ksi)	39.6
Yield Strength (ksi)	24.2
Elongation¹ (%)	16.0
Double Shear (ksi)	19.5
Compressive Strength (ksi)	57.5

¹Longitudinal values



TervAlloy™ tubular



- Based on the standard solution of KCl the TervAlloy dissolves in ranked from **0 to 3** (3 requires the highest salinity)
0: 0.01% KCl
1: 0.1% KCl
2: 1.0% KCl
3: 3.0% KCl
- Based on the rate of dissolution in the determined solution (see first number as noted above) at 60°C, ranked from **0 to 5** (5 being the highest/fastest)
0: 0-9 mg/cm²hr
1: 10-19 mg/cm²hr
2: 20-29 mg/cm²hr
3: 30-39 mg/cm²hr
4: 40-49 mg/cm²hr
5: 50-59 mg/cm²hr
- Based on the average ultimate tensile strength (UTS) ranked from **0 to 6** (6 being the highest) (**4**)
- Based on the elongation, ranked from **0 to 4** (4 being the highest rate of average elongation) (**3**)



TERVALLOY SELECTION GUIDE

TervAlloy™ 3143 (HD) is a special high ductility version of Terves' patented dissolvable magnesium designed for oil and gas applications. Below are some comparative charts outlining mechanical properties and dissolution rates for our TervAlloy product line:

TervAlloy Comparative Dissolution Rates (mg/cm²hr)

Salinity (%KCl)	Temp (°C)	TervAlloy 3241 (TAX 100E)	TervAlloy 3042 (TAX 50E)	TervAlloy 1530 (TAX FW)	TervAlloy 1132 (TAX FW+)	TervAlloy 3143 (TAX HD)	TervAlloy 1331
0.1	30	-	-	17	4	-	5
	45	5	-	34	6	3	10
	60	9	-	52	11	9	20
	75	12	1	84	15	12	30
	90	17	3	118	37	16	50
1	30	3	-	24	13	2	8
	45	10	-	48	25	8	18
	60	18	2	70	48	14	30
	75	25	3	132	74	19	55
	90	33	8	187	75	25	69
3	30	4	-	24	16	2	8
	45	13	-	51	29	9	18
	60	22	3	91	56	17	33
	75	34	5	148	90	24	60
	90	46	9	233	117	43	76

DISCLAIMER: The information provided in this document is intended to assist manufacturers and specifiers in the selection and use of Terves' products. All data noted should be understood to be average and expected performance, and is provided to serve as a general guideline only. This information **does not represent and is not to serve as minimum specification standards**. For further information contact Terves directly. All Terves commercially available products have patents or patents pending in the United States and in a variety of countries. For the latest patent information on this specific product contact Terves directly.

Terves products are covered by one or more of the following U.S. patents and patent applications: US 9,903,010; US 9,757,796; US 10,329,653; US 10,625,336; US 10,689,740; US 10,724,128; US 10,760,151; US 2020/029981; US 11,167,343; US 2021/0101204 and US 2019/0345585